INSTALLATION INSTRUCTION

TWO HANDLES BATH-SHOWER MIXER


XACCESSORIES CHECKING

LIST OF THE STANDARD ACCESSORIES:

Please double-check the accessory list hereinafter and contact our company or our distributor for any unconformity.

Remarks:


- 1. Without affecting their performancing, accessories may be changed without further notice;
- 2.Drawings for reference only, Product size & shape refer to actual faucet.

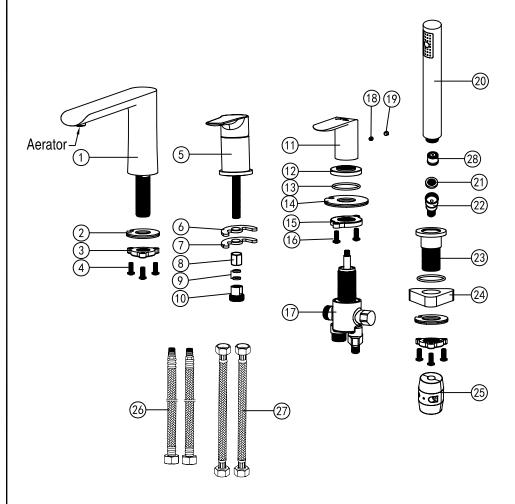



Code	The Accessory List	Ougat : +
1		quantity 1
'	Spout	'
2	Gasket assembly	2
3	Lock nut	2
4	Screw	6
5	Body	1
6	Rubber washer	1
7	Clamp	1
8	Nut	1
9	Washer	2
10	Connector	1
11	Handle	1
12	Base	1
13	0-ring	2
14	Gasket assembly	1
15	Lock nut	1
16	Screw	2
17	Diverter body	1
18	Screw	1
19	Screw cap	1
20	Hand shower	1
21	Washer	1
22	Shower hose	1
23	Shower base	1
24	Spacer	1
25	Weight	1
26	Flexible hose	2
27	Flexible connections	2
28	Check valve	1

XInstallation Instructions

- ☆ Do not disassemble the main body, as it has been installed & commissioned correctly & precisely before leaving the factory;
- ☆ To avoid the faucet from jamming,do flush the water pipe before installation;
- ☆ Using condition:Working pressure at 0.05-1.0MPa(including cold & hot water pressure), with applicable water temperature:4°C-90°C;
- ☆ Make sure to connect the hot/cold inlet pipe correctly,if standing in front,hot water pipe connecting to the left & cold water pipe connecting to the right.






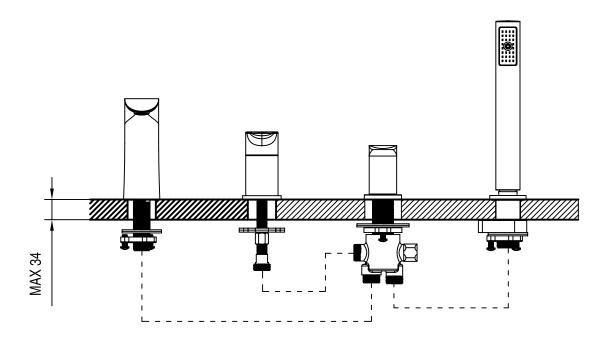

%Installation Procedures

- ☆ Make sure the installation holes to be in right size;
- ☆ Install the lavatory faucet and pop-up waste as per drawing, connect the main body & water supply pipe with water inlet pipe.

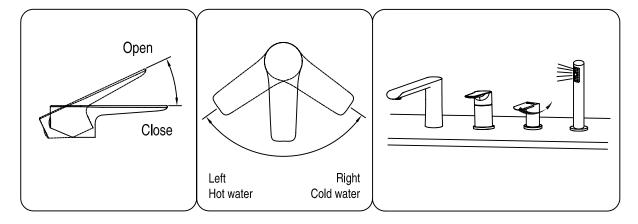

XUsage


☆How to operate the handle

- 1) Raise the handle up for opening water; push it down for close;
- 2) Turn the handle to the left to increase hot water flow for higher water temperature, and lower water temperature by operating reversely.

XCleaning & Maintenance


- - 1. Flush with clean water & dry with soft cloth only;
 - 2.If any dirt, clean with soft liquid or transparent glass detergent;
 - 3.Do not use any scrubbing detergent, polisher, sane-cloth, paper tissue or scraper;
 - 4.Do not use acid detergent, indissovable grain-like detergent or soap;
 - 5. Disassemble the aerator with a coin and clean it when necessary.



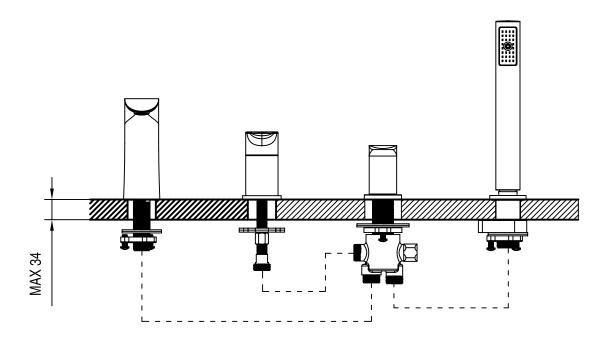

%Installation Procedures

- ☆ Make sure the installation holes to be in right size;
- ☆ Install the lavatory faucet and pop-up waste as per drawing, connect the main body & water supply pipe with water inlet pipe.

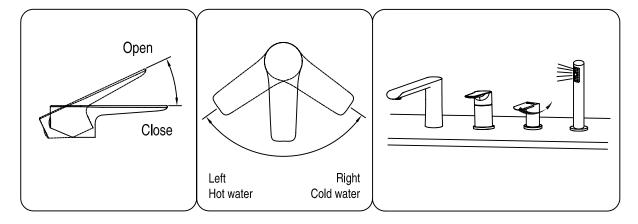

XUsage

☆How to operate the handle

- 1) Raise the handle up for opening water; push it down for close;
- 2) Turn the handle to the left to increase hot water flow for higher water temperature, and lower water temperature by operating reversely.

XCleaning & Maintenance

- - 1. Flush with clean water & dry with soft cloth only;
 - 2.If any dirt, clean with soft liquid or transparent glass detergent;
 - 3.Do not use any scrubbing detergent, polisher, sane-cloth, paper tissue or scraper;
 - 4.Do not use acid detergent, indissovable grain-like detergent or soap;
 - 5. Disassemble the aerator with a coin and clean it when necessary.

